



3.3JF

Aerating Fountain

3HP, 208/240V, 3 Phase



Includes all 6 Patterns

Patterns (Upper L to R)

- Redwood**—24'H x 8'W
- Linden**—19'H x 4.5'W Inner, 8'H x 35'W Outer
- Spruce**—21'H x 13'W
- Birch**—14.5'H x 10'W
(Operating w/out nozzle)

Patterns (Lower L to R)

- Willow**—13'H x 35'W
- Juniper**—9'H x 48'W

Quick Facts

- ⇒ Complete Package includes Assembled Motor Unit, Power Control Panel, UV Resistant High Density Thermoplastic Float, Three 50' Braided Nylon Mooring Lines, SOOW 4 Wire Power Cable, and 5 UV Resistant Glass Filled Thermoplastic Deflector Nozzles to Create 6 Unique Patterns
- ⇒ Operates in 24" (61cm) of Water
- ⇒ Total Package Listed by ETL to meet UL and CSA Standards for Safety in Water
- ⇒ Sacrificial Zinc Anode Installed for Corrosion Protection and use in Salt Water Applications
- ⇒ Series 300 Austenitic Stainless Steel Construction of Exposed Metal; Salt Water Compatible
- ⇒ 3 Year Warranty
- ⇒ UPS Shippable
- ⇒ Power Cable with Potted Quick Disconnect and Stainless Steel Strain Relief
- ⇒ Optional Low Voltage Lighting Package with 3 Machined Bronze Fixtures, Thermal Overload Protection, and 3 Internal Seals
- ⇒ 2 Light Sets Per Fountain with Optional Brackets
- ⇒ Energy Efficient with Excellent GPM/kW Rates
- ⇒ Industrial Strength Design
- ⇒ Top Intake for Shallow Water Operation
- ⇒ Bottom Screen with 84 Vertical Screening Bars with Less Than 1" Gaps to Keep Debris Out and Allow for Maximum Water Flow Into the Unit

Features

Motor Unit

- ⇒ 3HP, 208/240V, 3 Phase
- ⇒ 1750 RPM Motor
- ⇒ Oil Cooled, Continuous Duty Rated
- ⇒ Two Long Life Bearings
- ⇒ Fully Unitized Heavy Duty Silicon Carbide Mechanical Seal
- ⇒ Series 300 Austenitic Stainless Steel Motor Can with Engineering Grade Thermoplastic Top

Fountain Components

- ⇒ Single UV Resistant Thermoplastic Impeller
- ⇒ UV Resistant Thermoplastic Cone and Fountain Housing with 300 Series Stainless Steel Hardware
- ⇒ All 5 Deflector Nozzles Included with 300 Series Stainless Steel Hardware
- ⇒ Glass Filled UV Resistant Thermoplastic Deflectors
- ⇒ Quick Nozzle Change/Replacement

Control Panel

- ⇒ U.L. Listed Industrial Control Panel
- ⇒ NEMA 4x/3r, Non-Metallic Enclosure
- ⇒ 5ma Personnel GFI Protection
- ⇒ Surge Protector
- ⇒ Motor Starter with Adjustable Overload
- ⇒ Hand-Off-Auto Switch
- ⇒ Two 24 Hour Timers
- ⇒ Angled Terminal Block for Wiring

Float

- ⇒ UV Resistant High Density Thermoplastic
- ⇒ 3-Piece Lap Joint Float
- ⇒ Protective Coated 300 Series Stainless Steel Hardware
- ⇒ Protective Coated, 300 Series Stainless Steel Top and Bottom Screens; 84 Vertical Screening Bars w/ Gaps Tapered from .875" to .188" on Bottom Screen
- ⇒ Three 50' Braided Nylon Mooring Ropes

Power Cable

- ⇒ SOOW UL, CSA, & NEC Approved Underwater Rated Cable
- ⇒ 4 Wire Cable
- ⇒ Available in 50', 100', 150', 200', 250', 300', & 400' (500' special order) Options (Cord Gauges of 14, to 8 AWG; depending on length)
- ⇒ Potted Quick Disconnect and Stainless Steel Strain Relief
- ⇒ 6' Flex Sleeve Protection

Optional Lights

- ⇒ 3 Machined Bronze Fixtures
- ⇒ 12V, 75W MR-16 Bulbs
- ⇒ Thermal Overload Protection
- ⇒ Triple Sealed
- ⇒ ETL Listed & Approved for Floating Fountains; UL-676

Kasco 3.3JF Specifications

| Model # | HP | Cord Length | Cord Gauge | Voltage/Phase/Hz* | Running Amps | Lock Rotor Amps | Sugg. Pond Size (SA) ** | Min. Depth of Operation | Shipping Weight | Number of Boxes |
|----------|----|-------------|------------|-------------------|--------------|-----------------|-------------------------|-------------------------|-----------------|-----------------|
| 3.3JF050 | 3 | 50' | 14/4 | 240/3/60 | 10.3 | 61 | Up to 1.5 | 24" | 160 Lbs. | 4 |
| 3.3JF100 | 3 | 100' | 14/4 | 240/3/60 | 10.3 | 61 | Up to 1.5 | 24" | 167 Lbs. | 4 |
| 3.3JF150 | 3 | 150' | 12/4 | 240/3/60 | 10.3 | 61 | Up to 1.5 | 24" | 174 Lbs. | 4 |
| 3.3JF200 | 3 | 200' | 12/4 | 240/3/60 | 10.3 | 61 | Up to 1.5 | 24" | 201 Lbs. | 4 |
| 3.3JF250 | 3 | 250' | 12/4 | 240/3/60 | 10.3 | 61 | Up to 1.5 | 24" | 217 Lbs. | 4 |
| 3.3JF300 | 3 | 300' | 10/4 | 240/3/60 | 10.3 | 61 | Up to 1.5 | 24" | 254 Lbs. | 4 |
| 3.3JF400 | 3 | 400' | 10/4 | 240/3/60 | 10.3 | 61 | Up to 1.5 | 24" | 287 Lbs. | 4 |

* Motors and control panels will operate on either 208V or 240V, 3 phase power with 4 wire service plus ground (L1, L2, L3, N & G).

** Surface acreage (SA) is determined by multiplying length x width of the pond. The actual shape, depth, and oxygen demand should be considered when selecting a unit size.


Kasco Optional Lighting Package Specifications

| Model # | Cord Length | Number of Fixtures | Voltage/Phase/Hz | Wattage Per Fixture | Total Wattage | Lens Position | Shipping Weight | Number of Boxes |
|----------|-------------|--------------------|------------------|---------------------|---------------|---------------|-----------------|-----------------|
| LR375050 | 50' | 3 | 12/1/60 | 75 | 225 | Above Water | 20 Lbs. | 1 |
| LR375100 | 100' | 3 | 12/1/60 | 75 | 225 | Above Water | 24 Lbs. | 1 |
| LR375150 | 150' | 3 | 12/1/60 | 75 | 225 | Above Water | 28 Lbs. | 1 |
| LR375200 | 200' | 3 | 12/1/60 | 75 | 225 | Above Water | 31 Lbs. | 1 |
| LR375250 | 250' | 3 | 12/1/60 | 75 | 225 | Above Water | 35 Lbs. | 1 |
| LR375300 | 300' | 3 | 12/1/60 | 75 | 225 | Above Water | 38 Lbs. | 1 |
| LR375400 | 400' | 3 | 12/1/60 | 75 | 225 | Above Water | 56 Lbs. | 1 |

Light Kits include a built in, remote Low Voltage Transformer.

Operation


- ⇒ Submersed motor with top intake draws water into the fountain housing and pushes the water past the deflector nozzle and into the air.
- ⇒ Individual water droplets absorb oxygen from the atmosphere and return to the body of water transferring oxygen from the air and into the water.
- ⇒ Moving water mixes and agitates the water, spreading oxygenated water throughout the body of water.
- ⇒ Single impeller and deflector nozzle design allows for greater water flow with a lower likelihood of clogging.
- ⇒ Coated stainless steel bottom screen with 84 vertical bars with less than 1" gaps shall catch large debris and assist in reducing the likelihood of clogging while allowing for maximum water flow into the unit.



During unit operation, water is circulated from 360° around the unit as well as from below. Top intake for shallow water operation.



The motor unit attaches to the float using stainless steel hardware for a secure assembly. The 3 section, U.V. resistant, high density thermoplastic float allows for excellent durability with an attractive shape and low visibility. Rigid top and bottom screens help protect the unit from debris and reduce the likelihood of clogging.

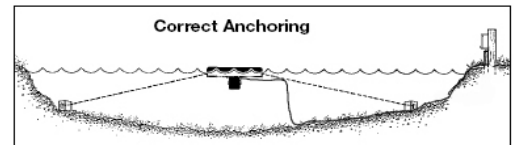

Assembly and Installation of Kasco equipment is quick and easy. Each unit includes an Owners Manual with specific steps to assemble, install, and operate the equipment properly.



Each 3.3JF Includes a UL Approved, 208/240V Power Control Panel complete with 5ma Personnel Protected Ground Fault Interrupter, two 24 Hour Mechanical Timers, Surge Protector, and Hand-Off-Auto switch. NEMA Type 4x/3r non-metallic enclosure.



The Optional Lighting Package easily mounts to the float and can be purchased and added at any time. ETL approved for Floating Fountains. UL-676.

Kasco Marine, Inc.
800 Deere Rd.
Prescott, WI 54021

Ph: (715) 262-4488 * Fax: (715) 262-4487
www.KascoMarine.com * www.GotAlgae.com
Sales@KascoMarine.com

